


DeVorm

Fost Acoustic Lamp

Installation guide

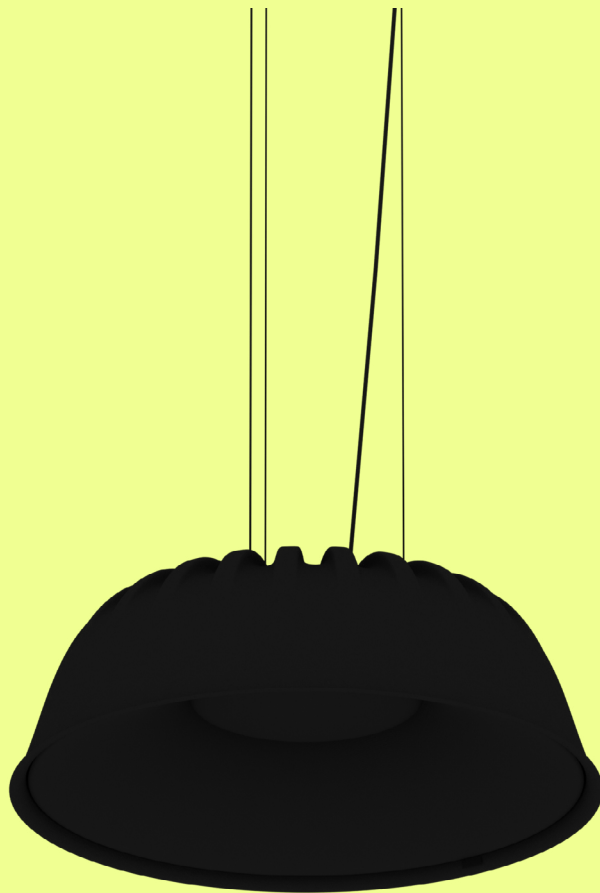

Introduction

- Follow the instructions for a safe installation.
- Make sure that the power supply has been turned off before installing or cleaning the product.
- Maintain interior lighting with a dry cloth or brush. Do not use alcohol or any other solvents to clean the product. Keep all electrical components dry. Make sure the power is switched off before cleaning this product.
- If the fixture is mounted on a metal surface, it must be earthed or connected to earthing from the electrical installation.




The lighting fixture has been designed, produced and tested according to European safety regulations (EN-60598 / CE). All used components are UL-registered. Changes in design and technical specifications reserved.




Connection

- 5 Pole wire - DALI dimming

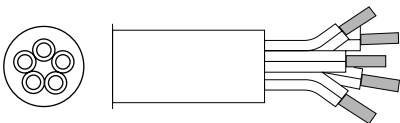

Brown	L
Blue	N
Yellow/green	Ground
Red	Dali+
White	Dali-

- 5 Pole wire - No dimming

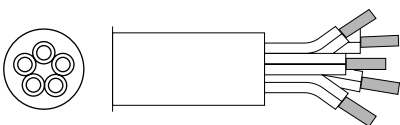

Brown	L
Blue	N
Yellow/green	Ground
Red	Not used
White	Not used

Design

De Vorm






About

With its generous dome shape and graphic expression, Fost Lamp offers a combined solution for acoustics and illumination. The PET felt lampshade has a soft texture and a bold ribbed pattern on the outside, while the inner surface features contrasting white 4-way stretch fabric. Enveloping the LED module, the fabric gently disperses the light down, granting an inviting sensation of privacy to everyone under the lamp.



Specifications

Light output	1100Lm
Voltage	120V-240V
Power	10W
Colour temperature	3000K / 4000K
CRI	>80
Beam angle	120°
Cover material	PC
Operating temperature	-20° - +65°
LED driver	Included
Dimmable	DALI
Rated life hours	L70B50 (50.000h)
Power factor	>0,9
IP rating	IP44

Parts required

Assembled Fost Lamp incl. 5-core transparent electrical cord 3m	Steel cable with ball end ø1.2mm x 3m	Ceiling cap + disk M14 x 1 3x	Screws P2 4x40 3x	Plug ø6x30mm 3x
				


Tools required

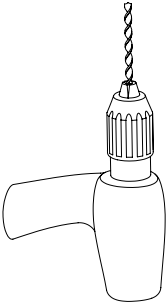Drill	PZ Cross-head screwdriver
	


Installation

1 Make sure the power is switched off.


2 Drill 3 holes with 220mm between them. Make sure you use the correct type of drill for the material you are drilling into.

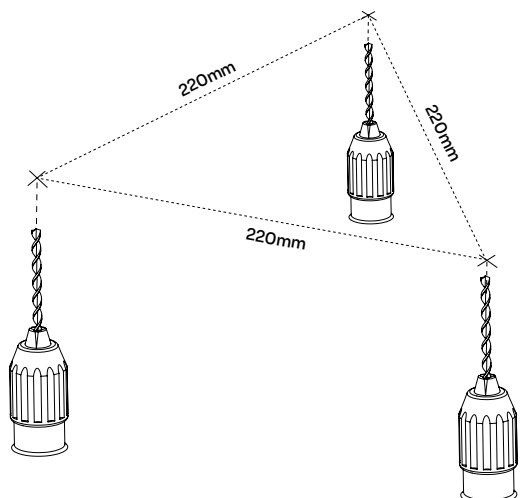


3 Insert plugs and screw the ceiling disk onto the plug.

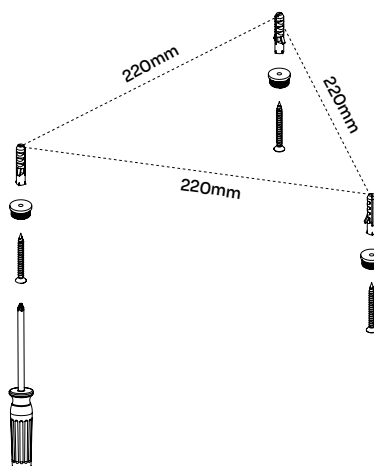

4 Insert the steel cable with ball end into the ceiling cap. Then mount the ceiling cap on the ceiling disk.

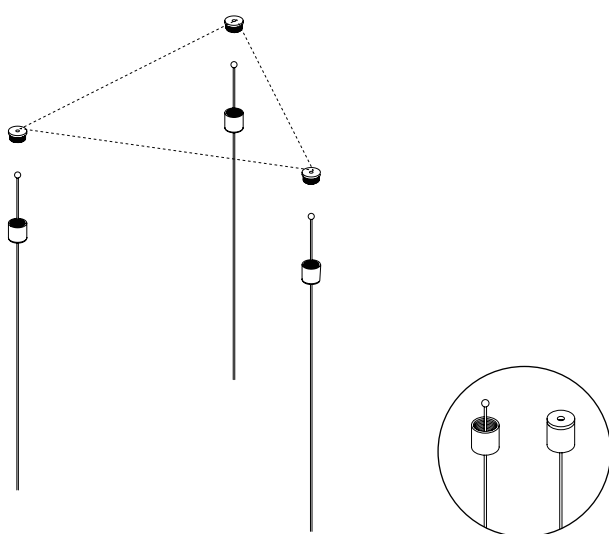

5 Push the three steel cables into the cable adjusters and adjust them to the desired height. Make sure to thread the steel cable through the transparent o-rings on the electrical cord.

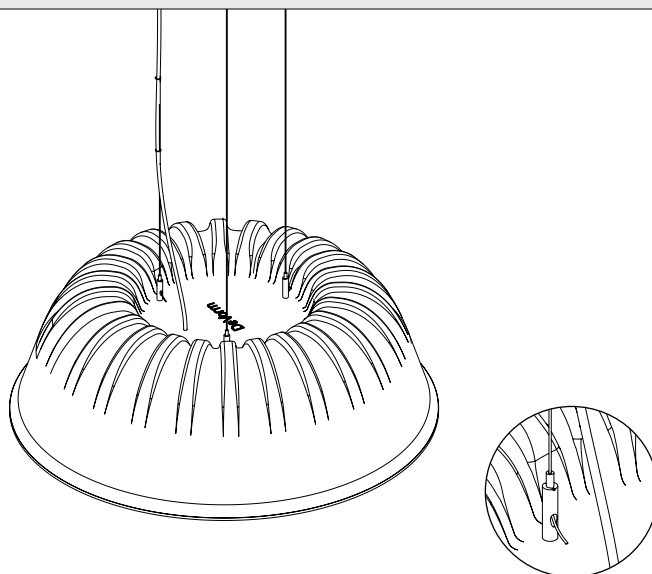

6 Connect to power supply — and you're done!

Find us at

A Dijkgraaf 38
6921 RL Duiven
The Netherlands

Get in touch

T +31 (0) 26 820 03 60
E sales@devorm.nl
W www.devorm.nl

Stay up to date

IG [@de_vorm](https://www.instagram.com/de_vorm)
LI [/company/de-vorm](https://www.linkedin.com/company/de-vorm)
PIN [/devorm_interiorproducts](https://www.pinterest.com/devorm_interiorproducts)