


DeVorm


Pivot Adjustable Lamp

Installation guide

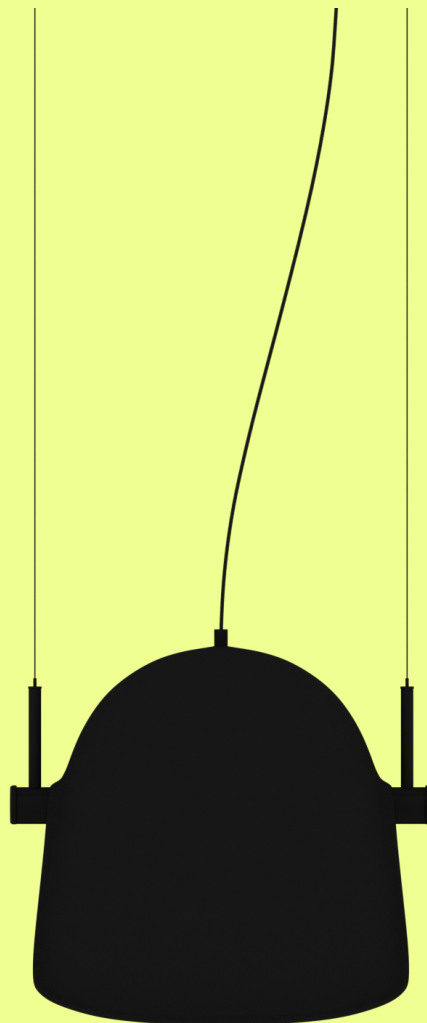


Introduction

- Follow the instructions for a safe installation.
- Make sure that the power supply has been turned off before installing or cleaning the product.
- All used components are UL-registered. Changes in design and technical specifications reserved.
- If the fixture is mounted on a metal surface, it must be earthed or connected to earthing from the electrical installation.

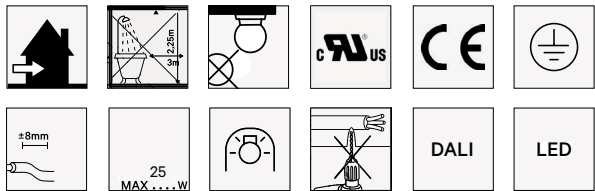


Connection

- 5 Pole wire - DALI dimming

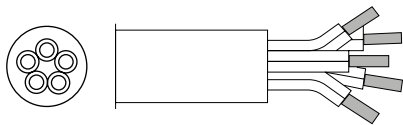

Brown	L
Blue	N
Yellow/green	Ground
Red	Dali+
White	Dali-

- 5 Pole wire - No dimming

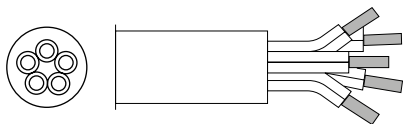

Brown	L
Blue	N
Yellow/green	Ground
Red	Not used
White	Not used

Design

De Vorm




About

Pivot lamp features an aluminium rail with a split PET Felt cap around it. Thanks to the rotatable fixture, the cap can be set into 5 positions to adjust the direction of light. Combining inherent flexibility with a playful and dynamic appearance, Pivot is suitable for various contexts in offices, restaurants and social spaces.



Specifications

Light output	2200Lm
Voltage	110V-240V
Power	25W
Colour temperature	3000K / 4000K
CRI	>80
Base material	PET
Cover material	PC
Operating temperature	-20° -65°
LED driver	Included
Dimmable	DALI
Rated life hours	L70B50 (50.000h)

Parts required

Assembled Pivot Lamp incl. electrical cord	Steel cable with ball end ø1mm x 3m 2x	Ceiling mount ø11x14mm 2x
		


Tools required

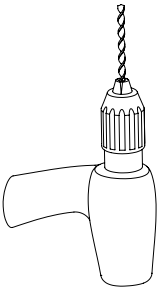Drill	PZ Cross-head screwdriver
	


Installation

1 Make sure the power is switched off


2 Drill two holes with 36cm between them. Make sure you use the correct type of drill for the material you are drilling into.

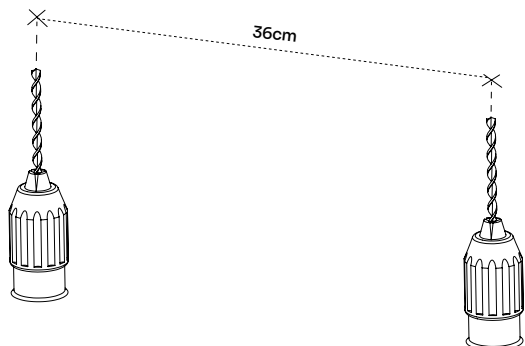


3 Insert plugs and screw the ceiling mount disk into the plug. Plug and screw are not included.

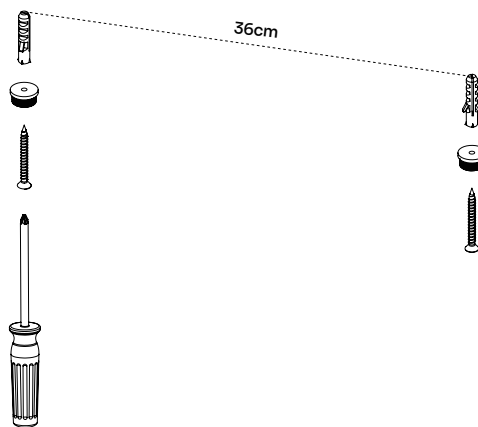



4 Insert the steel cable into the ceiling cap. Then mount the ceiling cap on the ceiling mount disk.





5 Cut the steel cable to the desired length. Thread the steel cable through the rubber rings on the cord and push the steel cables into the cable adjusters.

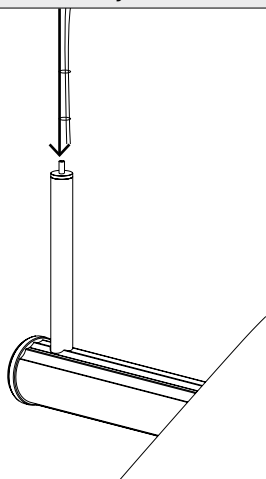

6 Adjust the steel cables accordingly by pushing the cable gripper down to lower the lamp.

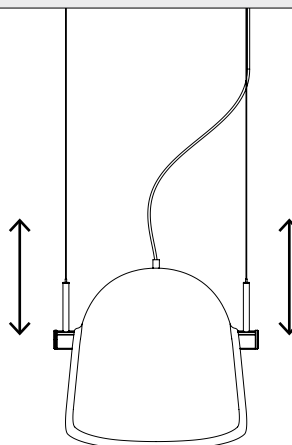

- 7** Connect the lamp to the power supply and you are all set! To adjust the direction of light, hold the horizontal rail while turning the lampshade into desired position. The lampshade can be set into 5 positions.

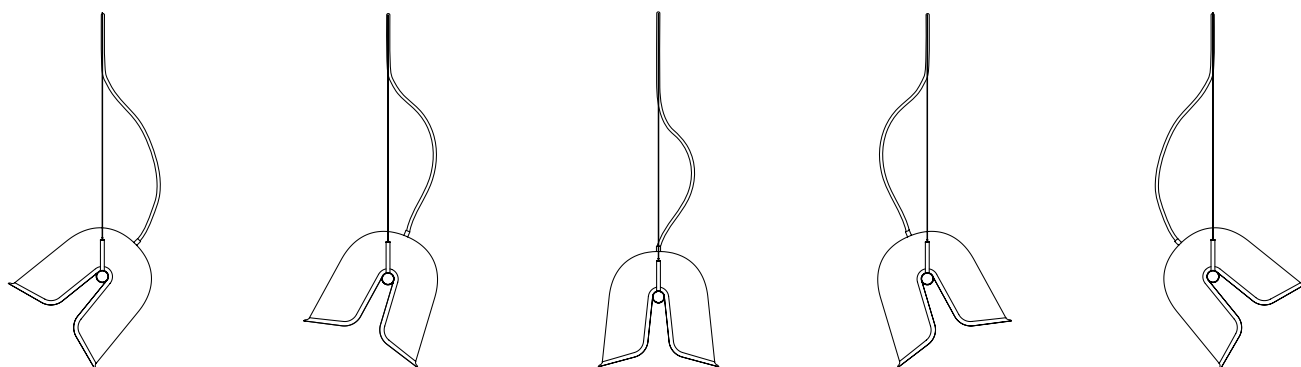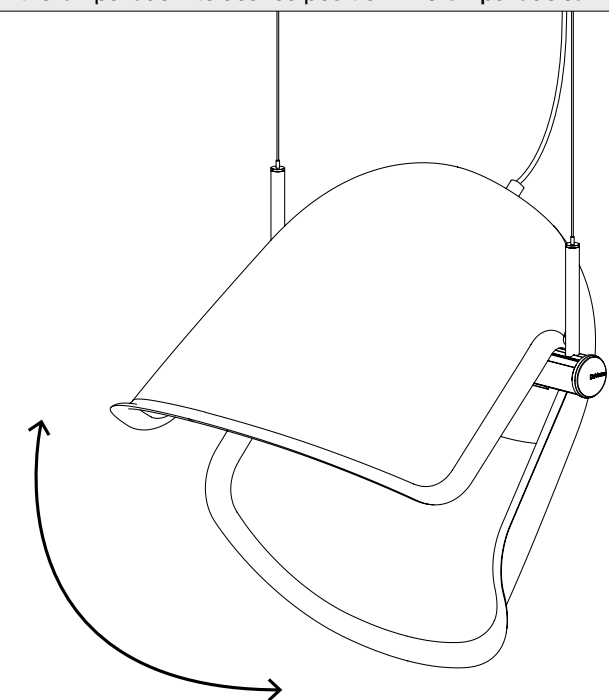

Find us at
A Dijkgraaf 38
6921 RL Duiven
The Netherlands

Get in touch
T +31 (0) 26 820 03 60
E sales@devorm.nl
W www.devorm.nl

Stay up to date
IG [@de_vorm](https://www.instagram.com/de_vorm)
LI [/company/de-vorm](https://www.linkedin.com/company/de-vorm)
PIN [/devorm_interiorproducts](https://www.pinterest.com/devorm_interiorproducts)